



Special Bar Quality (SBQ)

Dimension Standart
TS EN 10060

Other dimensions according to customer's request

Surface Quality Standart
TS EN ISO 9443

Other qualities according to customer's request

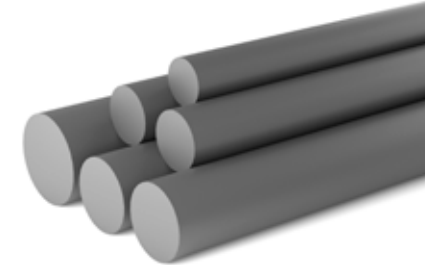

Nominal Diameter (d) (mm)	Deviation Limit (Normal) (mm)	Deviation Limit (Precision) (mm)	Tolerance on Diameter (kg/m)	Section (cm ²)
20	±0,5	±0,20	2,47	3,14
22	±0,5	±0,20	2,98	3,80
24	±0,5	±0,25	3,55	4,52
25	±0,5	±0,25	3,85	4,91
26	±0,6	±0,25	4,17	5,31
27	±0,6	±0,25	4,49	5,73
28	±0,6	±0,25	4,83	6,16
30	±0,6	±0,25	5,55	7,07
32	±0,6	±0,30	6,31	8,04
35	±0,6	±0,30	7,55	9,62
36	±0,6	±0,30	7,99	10,20
38	±0,8	±0,30	8,90	11,30
40	±0,8	±0,30	9,86	12,60
42	±0,8	±0,40	10,90	13,90
45	±0,8	±0,40	12,50	15,90
48	±0,8	±0,40	14,20	18,10
50	±0,8	±0,40	15,40	19,60
52	±1	±0,40	16,70	21,20
55	±1	±0,50	18,70	23,80
60	±1	±0,50	22,20	28,30
63	±1	±0,50	24,50	31,20
65	±1	±0,50	26,00	33,20
70	±1	±0,50	30,20	38,50
73	±1	±0,50	32,90	41,90
75	±1	±0,50	34,70	44,20
80	±1	-	39,50	50,30
85	±1,3	-	44,50	56,70
90	±1,3	-	49,90	63,60
95	±1,3	-	55,60	70,90
100	±1,3	-	61,70	78,50